
Pomona®

Model 4940 Adapter, TNC Female To TNC Female

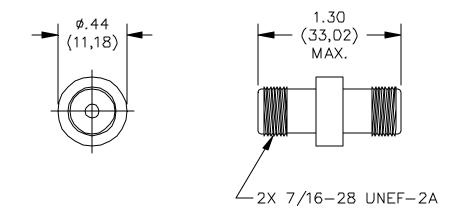

MATERIALS:

Body and Fittings: Brass per QQ-B-626, Alloy 360, ½ hard Center Contacts: Gold Plated Beryllium Copper per QQ-C-530, Cond. HT. Dielectric: PTFE Finish: Body and Fittings: Tarnish Resistant Center Contacts: Gold plated per requirements of MIL-C-39012 Marking: "POMONA 4940"

RATINGS:

Operating Voltage: 500 VRMS Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4940

All dimensions are in inches. Tolerances (except noted): $xx = \pm .02$ " (.51 mm), $xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
C:\Laura Goldberg\FlukeDataSheet\d4940 1 01.doc	