

## Data sheet | Item number: 789-665



Ground resistance signaling module; Ground fault alarm via digital output;

Supply voltage: 24 VDC; Module width: 18 mm

[www.wago.com/789-665](http://www.wago.com/789-665)



X1.1			X2.1
X1.2			
X1.3	+24 V U <sub>s</sub> <sup>+</sup>	0 V	X2.2

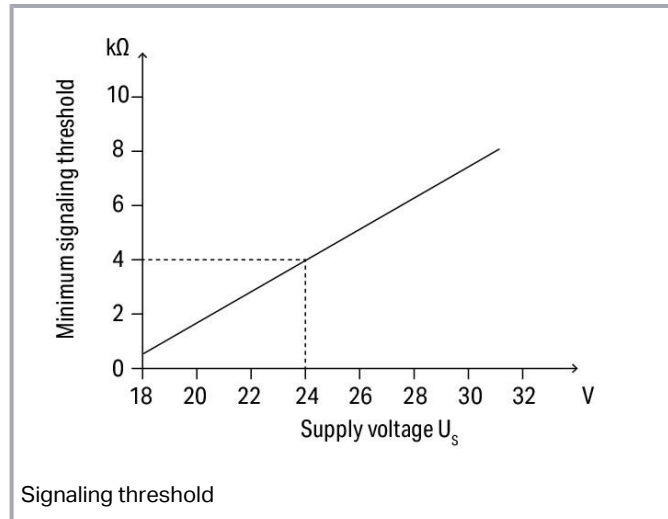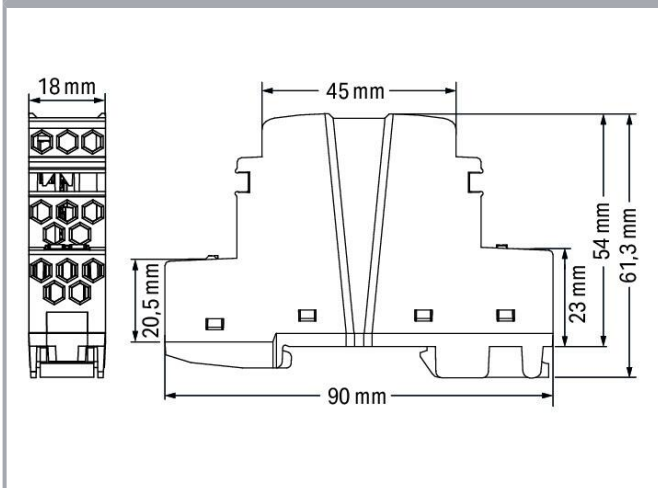

### Item description

#### Short description:

WAGO's module signals a value falling below a non-adjustable, asymmetric isolation resistance between +24 V or 0 V of the supply voltage and ground with a potential-free (Iso OK) contact and status LED. The Iso OK contact can be evaluated via a PLC.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

This status is maintained until the next measurement interval.

#### Operation with Grounded Control Circuit (Functional Potential Equalization)

- The module establishes an internal connection between the 0 V (X2.2) and ground (X2.1) connections via a semiconductor switch.
- At 10 s intervals, this connection between 0 V and ground is interrupted for 0.5 s, and the isolation resistance between +24 V (X1.3) or 0 V (X2.2) of the supply voltage and earth (X2.1) is determined.
- The grounding connection on the module does not meet the requirements of a protective earth terminal (PE). It serves as a functional ground. The measurement method does not involve the module establishing any permanent connection between 0 V and ground.

#### Operation with Ungrounded Control Circuit

- In this operating mode, the semiconductor switch to establish a connection between 0 V (X2.2) and ground (X2.1) is deactivated. At 1 s intervals, the isolation resistance offset is determined for 0.5 s.
- The module does not meet the requirements of an isolation monitoring device per EN 61557-8.

#### "Iso OK" Contact

- The potential-free contact serves the purpose of supporting evaluation (e.g., via a PLC) of looming isolation faults.
- This contact must not be used to switch safety-related products that could cause the circuit to switch off.

## Data

### Supply

Nominal supply voltage $U_S$	DC 24 V (SELV)
Supply voltage range (DC)	DC 18 ... 31.2 V
Current consumption at nominal supply voltage	$\leq 40$ mA
Power loss $P_I$	$\leq 1.7$ W
Current at ground fault (24 VDC) max.	56 mA

### Signaling

Operation status indicator	1 x LED "Status OK" (green) 1 x LED "Status OK" (green)
Signaling	1 x LED "Iso Alarm" (red) 1 x LED "Iso Alarm" 24 V – Ground (yellow) 1 x LED "Iso Alarm" 0 V – Ground (yellow) 1 x Signal output "Iso OK"

### Iso OK contact

Switching voltage (max.)	48 VDC (SELV)
Continuous current (max.)	500 mA (for general use)

Subject to changes. Please also observe the further product documentation!



Number of Iso OK contacts connected in series (max.)	25 (Limit value type: 1); 32 (Limit value type: 2 and 3) (per IEC 61131)
Function	1 make contact (NO); closed with applied power supply and insulation resistance > limit value

### Circuit protection

Backup fusing (required)	The fuse must be placed in the output circuit of the power supply. The fuse must be adapted to the power supply used and must trip safely in case of a short circuit. The module is designed for use with a 10 A (max.) fuse or with a 10 ADC (max.) circuit breaker (characteristic B or C).
--------------------------	---

### Safety and protection

Pollution degree	2
Overvoltage category	II
Protection type	IP20
Test voltage (supply/Iso OK contact)	1.5 kVAC; 50 ... 60 Hz; 1 min
MTBF	> 600,000 h (per MIL-HDBK-217F2)

### Mode: Ungrounded circuit

Response value for alarm at nominal voltage	4 k $\Omega$ (at $U_S = 24$ V; for other $U_S$ values, see diagram for signaling threshold)
Response time	1 s
Hysteresis (typ.)	1 k $\Omega$

### Mode: Grounded circuit

Response value for alarm at nominal voltage	4 k $\Omega$ (at $U_S = 24$ V; for other $U_S$ values, see diagram for signaling threshold)
Response time	10 s
Hysteresis (typ.)	1 k $\Omega$

### Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 10 \text{ K})$
Relative humidity	5 ... 95 % (non-condensing)
Operating altitude (max.)	3000 m

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Connection data

Connection type 1	X1.x
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® eCOM
Solid conductor	0.25 ... 1.5 mm <sup>2</sup> / 24 ... 14 AWG
Fine-stranded conductor	0.25 ... 1.5 mm <sup>2</sup> / 24 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm <sup>2</sup>
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm <sup>2</sup>
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Connection type 2	X2.x
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	<i>picoMAX</i> ® eCOM
Solid conductor 2	0.2 ... 2.5 mm <sup>2</sup> / 24 ... 12 AWG
Fine-stranded conductor 2	0.2 ... 2.5 mm <sup>2</sup> / 24 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.25 ... 1.5 mm <sup>2</sup>
Fine-stranded conductor; with uninsulated ferrule 2	0.25 ... 2.5 mm <sup>2</sup>
Strip length 2	9 ... 10 mm / 0.35 ... 0.39 inches

## Physical data

Width	18 mm / 0.71 inches
Height	90 mm / 3.54 inches
Depth from upper-edge of DIN-rail	51 mm / 2.01 inches

## Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

## Material Data

Weight	47 g
--------	------

## Standards and specifications

Conformity marking	CE
EMC immunity to interference	EN 61000-6-2
EMC emission of interference	EN 61000-6-3; EN 61000-6-4
Standards/specifications	UL 61010-2-201

Subject to changes. Please also observe the further product documentation!

## Commercial data



ETIM 8.0	EC003596
ETIM 7.0	EC003596
PU (SPU)	1 pcs
Country of origin	CN
GTIN	4066966120820
Customs tariff number	85365005000

## Environmental Product Compliance


RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Approvals / Certificates


### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

### Approvals for hazardous areas

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Subject to changes. Please also observe the further product documentation!

## Optional accessories

### Tool

Operating tool



Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

[www.wago.com/210-719](http://www.wago.com/210-719)

### Marking accessories

Marking strip



Item no.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)

Marker carrier



Item no.: 2009-198

Adaptor; gray

[www.wago.com/2009-198](http://www.wago.com/2009-198)

## Downloads

### Documentation

#### Bid Text

789-665	xml	Download
X81 - Datei	10.4 kB	

789-665	docx	Download
docx - Datei	29.4 kB	

#### Instruction Leaflet

Erdwiderstand-Signalisierungsmodul	V 1.0.0	pdf	Download
Überspannungsschutz und Sonderelektronik	2020 Nov 17	2.7 MB	

## CAD/CAE-Data

### CAD data

2D/3D Models 789-665	URL	Download
----------------------	-----	----------

### CAE data

ZUKEN Portal 789-665	URL	Download
----------------------	-----	----------

EPLAN Data Portal 789-665	URL	Download
---------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!



## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 789-665

URL

Download

Ground resistance signaling module; Ground fault alarm via digital output; Supply voltage: 24 VDC; Module width: 18 mm

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.