


Pan-Way® TG-70 Surface Raceway System

specifications

TG non-metallic multi-channel surface raceway shall be used to route, protect and conceal data, voice, video, fiber optic and power cabling. The raceway shall be listed as suitable for use in applications up to 600 volts between conductors by Underwriters Laboratories, Inc. per standard 5A, and by Canadian Standards Association, Inc. per 22.2 no. 62.1-03, when screw secured and installed per instructions. A full complement of fittings with a 40mm (1.6") minimum bend radius compliant with TIA/EIA-568-B must be available as well as device brackets and internal junction boxes to install a variety of communication and electrical devices. Divider walls must be available to form separate channels in the multi-channel raceway. Panduit "snap-on" faceplates for data and power terminations shall be available. TG raceway will be manufactured from impact-resistant material with flammability rating of V-0. TG raceway must be tamper resistant, yet allow access for moves, adds and changes. TG raceway finish shall be pure color and will resist scratches and dents and will not peel or corrode. TG raceway shall be available in three standard colors and shall be optimized for use with the Panduit® Pan-Net® Communication System.

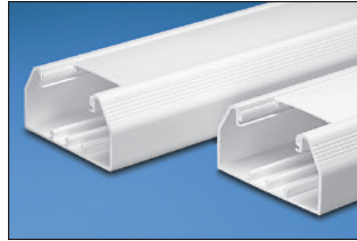

technical information

Material:	Rigid PVC
Flammability:	UL94V-0; FT4
Voltage rating:	UL-5A 600VAC; CSA C22.2 No. 62.1-03 600V
Approvals:	UL Listed 95425 (raceway); UL Listed E116129 (fittings); CE Listed
NEC:	Article 388
Color:	Off-White (IW) and Electrical Ivory (EI); International Gray (IG) available in 8' lengths only.
CSI spec form:	LP-CSISPEC-TG70-1

key features and benefits

Large cable capacity	Provides maximum cable routing space which allows for a large number of cables to be routed within a single raceway channel
40mm (1.6) bend radius control fittings	Increased bend radius control to satisfy the needs and maximizes the headroom of larger diameter high performance copper cable and fiber optic cabling
Snap-on faceplates	Faceplates snap directly onto the raceway base; cabling can be quickly accessed by removing only the faceplate, which requires less labor and lowers the cost of maintenance
Channel has a 70mm opening	Accepts any manufacturer's NEMA standard snap-on or screw-on power or communication faceplates
Non-metallic construction	Lightweight, reducing installer fatigue; solid color through out profile will not chip, peel, rust, corrode, or scratch; easy to cut reducing the need for special cutting devices; high impact resistance; durable
Designer profile	Aesthetically pleasing and matches a wide variety of decors
Available in three standard colors	Matches a variety of colors for various applications of decors

applications

Pan-Way® TG-70 Surface Raceway is a multi-channel channel raceway which provides a solution for routing low voltage, fiber optic and/or power cabling when maximum cable

capacity is required. TG-70 Raceway can mount NEMA standard screw-on faceplates or superior Pan-Way® Snap-On Faceplates directly to the channel.

Pan-Way® TG-70 Raceway

Raceway Base and Cover (packaged together)

8 feet:	TG70IW8
10 feet:	TG70IW10

Replacement Cover

8 feet:	T70CIW8
10 feet:	T70CIW10

Divider Wall

8 feet:	TGDW8
10 feet:	TGDW10

TG-70 Raceway Fittings and Accessories

Base coupler: TG70BCIW-X

Cover coupler: T70CCIW-X

Adjustable outside corner fitting: TGOCIW

Adjustable inside corner fitting: TGICIW

Non-adjustable inside corner fitting: TGSICIW

Non-adjustable outside corner fitting: TGSOCIW

Right angle fitting: TGRAIW

End cap fitting: TGECIW

Tee fitting: TGTIW

Tee divider insert: TGTD

Transition fitting: TGTRIW

Wire retainer: TG70WR-X

Device bracket: T70DB-X

Three sided hanging box: TG70HB3-X

GFCI three sided hanging box: TG70HB3GFCI-X

Backfeed fitting: TGBFIW

Backfeed fitting insert: TGBFI

Entrance end fitting: TGEEIW


Standard faceplate bracket: T70SDB-X

Fiberspool bracket (2 halves): TGFSB


For standard colors other than Off White (IW), replace IW in part number with EI (Electrical Ivory) or IG (International Gray). International Gray available in 8' lengths only.

Pan-Way® TG-70 Surface Raceway System


Fittings and Accessories




TG70BC-X




T70CC-X




TG0C




TGSOC




TGIC




TGSIC




TGRA




TGEC




TGT




TGTR




TGDW




TGTD




TG70WR-X




T70DB-X




TG70HB3-X



TG70HB3GFCI-X



TGBFI




TGBF



TGEE



TGFSB



T70SDB-X

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2015 Panduit Corp.
ALL RIGHTS RESERVED.
Printed in the U.S.A.
SRSP31-WW-ENG
Replaces WW-SRSP13
1/2015